


Niagara™ Black Stripping Pad 7200N, 17 in, 5/Case

UPC #: 00048011350202, 3M Catalog #: 7200N-17, 3M Stock #: 7010384512,
Previous 3M Stock #: 70071165339, Your Catalog #: Manage

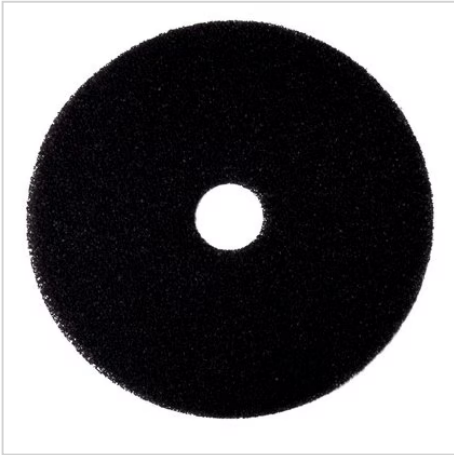

Make To Order | **In Stock**

Est. Lead Time: 2 Working Days

- Conventional speed (175-600 RPMs)
- For most types of floor finish
- Black stripping pad
- Washable, reusable pad reduces supply costs
- Use with rotary or automatic floor machines
- Low speed 175 - 600 RPM
- *Certified by Green Seal® for Environmental Innovation based on a design for significantly improved initial and mid-life performance compared to competitive products, extending the useful life of the floor pad and reducing solid waste generation

Specifications

* Smallest Saleable Unit

Details

Application	Stripping
Brand	Niagara™
eClass 14 Classification Group	29110102
Factory ISO Certification	No ISO Certification information available

Grade	Coarse
Machine Speed	150-400 RPM
Overall Diameter (Imperial)	17 in
Overall Diameter (Metric)	432 mm
Overall Height (Metric)	85 mm
Product Color	Black
Product Type	Stripping Pads
Recommended Application	Wet Stripping
Shape	Round
Smallest Saleable Unit*	Case
Substrate	Concrete Industrial Floors

Dimensions and Classifications

Case Gross Weight*	3.2 US pound
Case Height*	5.8 Inch
Case Length*	17.7 Inch
Case Width*	17.4 Inch
Each Gross Weight	0.64 US pound
Pallet Gross Weight	171 US pound
Pallet Height	51.9 Inch
Pallet Length	48 Inch
Pallet Width	42 Inch
ECCN	EAR99
Harmonized Code	6805301000

Packaging and Identifications

Primary Shipping Location	PRAIRIE DU CHIEN, Wisconsin
Country of Origin	USA
Country of Origin Disclaimer	This is to advise you that as of this date, the Country of Origin for the product(s) displayed is as follows. This origin is for purposes of Normal Trade Relations (NTR) duty treatment, is for import/export documentation only, and is not intended to be used for any other purpose such as sales to government entities or Free Trade Agreement eligibility. Government procurement laws and Free Trade Agreements require application of specific criteria

that may result in a different Country of Origin than indicated. These determinations are specific to Solventum ID.

UPC/EAN – Shipper (Case)*	00048011350202
per Case*	5 Each
per Pallet	220 Each

Transportation

Transport Protective Service	PROTECTIVE SERVICE NOT REQUIRED
NMFC Item	149240
NMFC Sub	03
NMFC Class	250.0
Flash Point	No Flash Point
United States Department of Transportation - Ground (US DOT, 49 CFR)	NOT REGULATED
United States Department of Transportation - Vessel (US DOT, 49 CFR)	NOT REGULATED
International Air Transport Association (IATA)	NOT REGULATED
International Maritime Organization (IMO)	NOT REGULATED
Transportation Disclaimer	These transportation classifications are provided as a customer service. AS THE SHIPPER YOU REMAIN RESPONSIBLE FOR COMPLYING WITH ALL THE APPLICABLE LAWS AND REGULATIONS, INCLUDING PROPER TRANSPORTATION CLASSIFICATION AND PACKAGING. 3M's transportation classifications are based on product formulations, packaging, 3M policies and 3M's understanding of applicable current regulations and is valid for the original 3M package only. 3M does not guarantee the accuracy of this classification information. This information applies only to transportation classification and NOT THE PACKAGING, LABELING OR MARKING REQUIREMENTS. The original 3M package is certified for U.S. ground shipment only. If you are shipping by air or ocean, the package may not meet applicable regulatory requirements.
Air Shipping Available	Yes
Dry Ice Shipping Required	No

Details

- Conventional speed (175-600 RPMs)
- For most types of floor finish
- Black stripping pad
- Washable, reusable pad reduces supply costs
- Use with rotary or automatic floor machines
- Low speed 175 - 600 RPM
- *Certified by Green Seal® for Environmental Innovation based on a design for significantly improved initial and mid-life performance compared to competitive products, extending the useful life of the floor pad and reducing solid waste generation

For long lasting stripping of finish, dirt and buildup

Equipment Type: Rotary or Automatic Machine Speed: Low Speed, 175 600 RPM